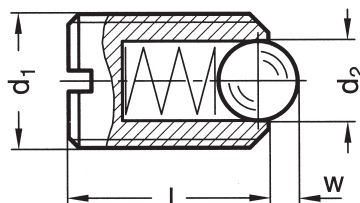


3020-3030

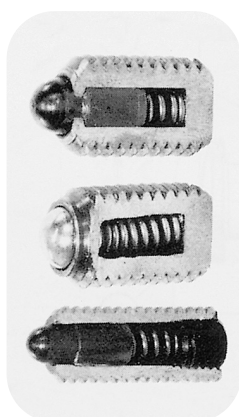

Posicionador de bola

Material: Ref 3020 Cuerpo F1140 pavonado.
Bola de acero templado.
Ref 3030 Cuerpo y muelle acero inoxidable Aisi 303.
Bola acero inoxidable.



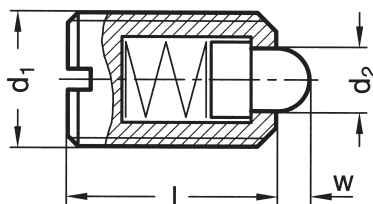
Ejemplo de pedido: ULM 3020-03

Referencia Acero pavonado	Referencia Acero inoxidable	d ₁	d ₂	l ^{±0,1}	w	Presión del muelle daN	
						inicial	máxima
3020-03	3030-03	M3	1,5	7	0,4	0,3	0,45
3020-04	3030-04	M4	2,5	9	0,8	0,6	1,45
3020-05	3030-05	M5	3	12	0,9	0,8	1,4
3020-06	3030-06	M6	3,5	14	1	1,1	1,8
3020-08	3030-08	M8	4,5	16	1,5	1,8	3,1
3020-10	3030-10	M10	6	19	2	2,4	4,5
3020-12	3030-12	M12	8	22	2,5	2,6	4,9
3020-16	3030-16	M16	10	24	3,5	4,1	8,6
3020-20	3030-20	M20	12	30	4,5	5,6	11,1
3020-24	3030-24	M24	15	34	5,5	8,1	15,1


3021-3031


Posicionador de pivote

Material: Ref 3021 Cuerpo F1140 pavonado.
Pivote F1510 cementado, templado y pavonado.
Ref 3031 Cuerpo y muelle de acero inoxidable Aisi 303.
Pivote acero nitrurado.



Ejemplo de pedido: ULM 3021-04

Referencia Acero pavonado	Referencia Acero inoxidable	d ₁	d ₂	l ^{±0,1}	w	Presión del muelle daN	
						inicial	máxima
3021-04	3031-04	M4	1,8	9	1,5	0,45	1,25
3021-05	3031-05	M5	2,4	12	2	0,5	1,3
3021-06	3031-06	M6	2,7	14	2	0,6	1,7
3021-08	3031-08	M8	3,8	16	2	1,6	3,3
3021-10	3031-10	M10	4,5	19	2,5	1,9	4,2
3021-12	3031-12	M12	6	22	3,5	2,2	5,7
3021-16	3031-16	M16	8,5	24	4,5	3,8	7,8
3021-20	3031-20	M20	10	30	6,5	3,9	8,1
3021-24	3031-24	M24	13	34	8	7,2	15,5

